

# iX Panel T12B


High-Performance HMI with 12.1" Display and Automation Software

The high-performance iX Panel T12B features a bright 12.1" widescreen TFT display with touch screen, powerful processor and iX software with universal connectivity.



## Product Highlights

- ▶ 1280 x 800 pixel, 12.1" diagonal, LED lighted, TFT color LCD display with touch screen
- ▶ One 10/100Base-T and one 10/100/1000Base-T Ethernet ports
- ▶ Four serial ports (RS-232, -422/485)
- ▶ Powder-coated aluminum housing
- ▶ iX Software with protocols for most industrial automation controllers

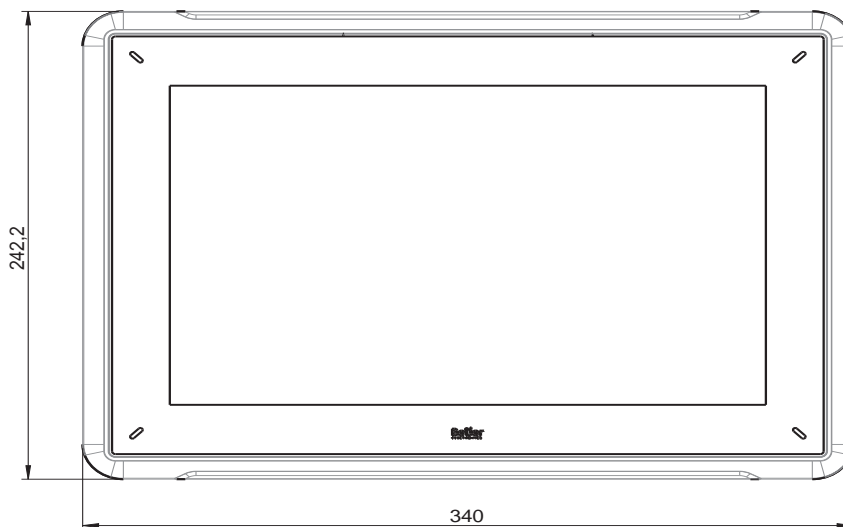

Dimensions shown in mm.

## iX Panel T12B Specifications

Feature	Detail	Description
Display	Type	1280 x 800, TFT Color LCD
	Size	12.1"
	Lighting	White LED
	Brightness	400 cd/m2
Touch Screen	Type	Analog-resistive
Interface	Ethernet	10/100Base-T, 10/100/1000Base-T
	Serial	2 x RS232, 2 x RS422/485
	USB	Three USB 2.0
	Communication Modules	CAN, MPI (pending)
Processor	Type	Intel® Atom (1.1 GHz)
Memory	Main	1 GB DDR2 MB
	Application	1.4 GB
	External Storage Media	One SD card (optional)
Realtime Clock	Standard	Battery-backed
Power	Input Voltage	+24 VDC (18-32 VDC)
	Consumption	22 Watts
Mechanical	Type	Panel-mount and VESA 75 x 75
	Size WxHxD	340 x 242.2 x 57 mm
	Cut-out Dimensions WxHxD	324 x 226 x 50 mm
	Mass	2.1 kg
	Housing Material	Powder-coated aluminum

Environmental	Protection (front/rear)	IP65 / IP20
	Temperature	Operating: -10 to 50 °C; Storage: -20 to 70 °C
Certifications	UL	UL 508 (pending), DNV (pending)
	CE	EN61000-6-4, EN61000-6-2

Software	Development Environments	iX Developer
	Runtime Environments	iX Software



### US Office

Beijer Electronics, Inc.  
2212 South West Temple #50  
Salt Lake City, Utah 84115-2648 USA

www.BeijerElectronicsInc.com / 801-466-8770

### Headquarters

Beijer Electronics Products AB  
P.O. Box 426  
201 24 Malmö, Sweden

www.BeijerElectronics.com / +46 40 35 86 00

M01-077-00 REV 01  
10 APRIL 2012

Copyright © 2012 Beijer Electronics. All rights reserved.

The information at hand is provided as available at the time of printing. Beijer Electronics reserves the right to change any information without updating this publication. Beijer Electronics does not assume any responsibility for any errors or omissions in this publication.