


DX-H MCBs - 10 kA


thermal-magnetic MCBs up to 125 A
type B and C curves

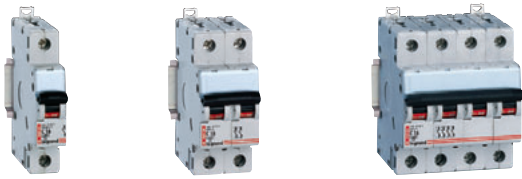

0068 60

0069 20

0070 00



Breaking capacity : 10 kA to BS EN 60898-1
12.5 kA up to 25 kA to BS EN 60947-2 - 400 V \sim

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	B curve	C curve		
1	0066 91	0068 52	1	1
1	0066 92	0068 53	2	1
1	0066 93	0068 54	3	1
1	0066 95	0068 56	6	1
10	0066 97	0068 58	10	1
10	0067 00	0068 60	16	1
1	0067 01	0068 61	20	1
1	0067 02	0068 62	25	1
1	0067 03	0068 63	32	1
1	0067 04	0068 64	40	1
1		0068 65	50	1
1	0067 06	0068 66	63	1
1		0063 83	80	1.5 ⁽¹⁾

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	B curve	C curve		
1	0067 52	0069 12	1	2
1	0067 53	0069 13	2	2
1	0067 54	0069 14	3	2
1	0067 56	0069 16	6	2
1	0067 58	0069 18	10	2
5	0067 60		16	2
1		0069 20	16	2
1	0067 61	0069 21	20	2
1	0067 62	0069 22	25	2
1	0067 63	0069 23	32	2
1	0067 64	0069 24	40	2
1		0069 25	50	2
1	0067 66	0069 26	63	2
1		0064 75	80	3 ⁽¹⁾
1		0064 76	100	3 ⁽¹⁾
1		0064 77	125	3 ⁽¹⁾

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	B curve	C curve		
1	0067 72	0069 32	1	3
1	0067 73	0069 33	2	3
1	0067 74	0069 34	3	3
1	0067 76	0069 36	6	3
1	0067 78	0069 38	10	3
1	0067 80	0069 40	16	3
1	0067 81	0069 41	20	3
1	0067 82	0069 42	25	3
1	0067 83	0069 43	32	3
1	0067 84	0069 44	40	3
1	0067 85	0069 45	50	3
1	0067 86	0069 46	63	3
1		0064 95	80	4.5 ⁽¹⁾
1		0064 96	100	4.5 ⁽¹⁾
1		0064 97	125	4.5 ⁽¹⁾

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	B curve	C curve		
1	0068 32	0069 92	1	4
1		0069 93	2	4
1		0069 94	3	4
1	0068 36	0069 96	6	4
1	0068 38	0069 98	10	4
1	0068 40	0070 00	16	4
1	0068 41	0070 01	20	4
1	0068 42	0070 02	25	4
1	0068 43	0070 03	32	4
1	0068 44	0070 04	40	4
1	0068 45	0070 05	50	4
1	0068 46	0070 06	63	4
1		0065 70	80	6 ⁽¹⁾
1		0065 71	100	6 ⁽¹⁾
1		0065 72	125	6 ⁽¹⁾

(1) These MCBs are for standalone use only, not with distribution boards
(2) Suitable for type B flexible boards only

DX-D MCBs - 10 kA


thermal-magnetic MCBs up to 125 A
type D curve



0066 33

0066 56

0066 71



Breaking capacity : 6 kA to BS EN 60898-1 up to 63 A - 400 V \sim
10 kA to BS EN 60898-1 80 A to 125 A

15 kA to BS EN 60947-2 up to 32 A - 400 V \sim
10 kA to BS EN 60947-2 40 A to 125 A - 400 V \sim
Magnetic adjusted between 10 and 14 In

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	D curve			
1	0065 75		1	1
1	0065 76		2	1
1	0065 77		3	1
1	0065 78		4	1
1	0065 79		6	1
1	0065 81		10	1
1	0065 83		16	1
1	0065 84		20	1
1	0065 85		25	1
1	0065 86		32	1
1	0065 87		40	1
1	0065 88		50	1
1	0065 89		63	1

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	D curve			
1	0066 25		1	2
1	0066 26		2	2
1	0066 27		3	2
1	0066 28		4	2
1	0066 29		6	2
1	0066 31		10	2
1	0066 33		16	2
1	0066 34		20	2
1	0066 35		25	2
1	0066 36		32	2
1	0066 37		40	2
1	0066 38		50	2
1	0066 39		63	2
1	0066 40		80	3 ⁽¹⁾
1	0066 41		100	3 ⁽¹⁾
1	0066 42		125	3 ⁽¹⁾

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	D curve			
1	0066 45		1	3
1	0066 46		2	3
1	0066 47		3	3
1	0066 48		4	3
1	0066 49		6	3
1	0066 51		10	3
1	0066 53		16	3
1	0066 54		20	3
1	0066 55		25	3
1	0066 56		32	3
1	0066 57		40	3
1	0066 58		50	3
1	0066 59		63	3
1	0066 60		80	4.5 ⁽¹⁾
1	0066 61		100	4.5 ⁽¹⁾
1	0066 62		125	4.5 ⁽¹⁾

Pack	Cat. Nos.		Nominal rating (A)	Number of 17.5 mm modules
	D curve			
1	0066 65		1	4
1	0066 66		2	4
1	0066 67		3	4
1	0066 68		4	4
1	0066 69		6	4
1	0066 71		10	4
1	0066 73		16	4
1	0066 74		20	4
1	0066 75		25	4
1	0066 76		32	4
1	0066 77		40	4
1	0066 78		50	4
1	0066 79		63	4
1	0066 80		80	6 ⁽¹⁾
1	0066 81		100	6 ⁽¹⁾
1	0066 82		125	6 ⁽¹⁾

(1) These MCBs are for standalone use only, not with distribution boards
(2) Suitable for type B flexible boards only