



Main/Emergency-Off Switch ■
Main Switch ■

3 ... 4 pole

IP66

Insulated polycarbonate enclosure
Cover security through screw cover

Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 20A, N-padlock device:

Type - Switching programme - Mounting form

H212 - 41400 - 077N4


Type	Rated data (IEC 60947)		
	Operational current I _e AC-21A (A)	Operational power (at 380–440V) AC-23A (kW) AC-3 (kW)	
H212	20	5.5	3.7

Detailed technical data page 108.

Switching progr.	Poles	Auxiliary contacts		Switching diagram	
		n/o	n/c		
41300	3	0	0		
41400	4	0	0		

Mounting form	Operator	Main/Emergency-Off Switch	Mounting form	Operator	Main Switch
077N4		N-padlock device yellow/red	077N1		N-padlock device black
077M4		M-padlock device yellow/red	077M1		M-padlock device black
077V4		padlockable with V-handle yellow/red	077V1		padlockable with V-handle silver/black

Dimensions in mm:

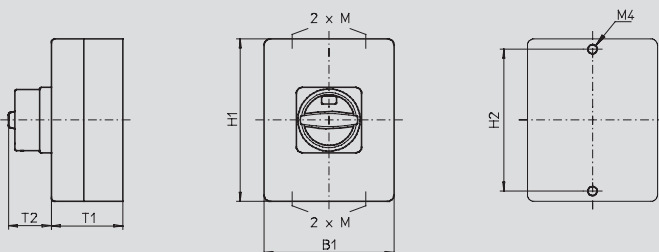

Mounting form	H1	B1	T1	T2	2xM	H2
077N4 / 077N1	100	80	65	38	20	90
077M4 / 077M1	100	80	65	38	20	90
077V4 / 077V1	100	80	65	32	20	90