

## Insulated enclosure

125 × 100 × 85 mm

20 A / 25 A / 32 A

- Main/Emergency-Off Switch
- Main Switch

3 ... 4 pole

### IP66

Insulated polycarbonate enclosure  
Cover interlock in ON position



#### Order code structure:

Ordering example: 4 pole Main/Emergency-Off Switch, 25A, N-padlock device:

Type - Switching programme - Mounting form

H220 - 41400 - 700N4

| Type | Rated data (IEC 60947)                           |  |     |
|------|--|--|-----|
|      | Operational current I <sub>e</sub><br>AC-21A (A) | Operational power (at 380–440V)<br>AC-23A (kW) AC-3 (kW) |     |
| H216 | 20   | 5.5  | 3.7 |
| H220 | 25   | 7.5  | 5.5 |
| H226 | 32   | 11   | 7.5 |


Detailed technical data page 108.

| Switching progr. | Poles | Auxiliary contacts |     |
|------------------|-------|--------------------|-----|
|                  |       | n/o                | n/c |
| 41300            | 3     | 0                  | 0   |
| 41311            | 3     | 1                  | 1   |
| 41320            | 3     | 2                  | 0   |
| 41400            | 4     | 0                  | 0   |
| 41411            | 4     | 1                  | 1   |
| 41420            | 4     | 2                  | 0   |

Switching diagrams and further switching programmes (3 ... 4 pole) page 95.

| Mounting form | Operator | Main/Emergency-Off Switch               | Mounting form | Operator | Main Switch                               |
|---------------|----------|---|---------------|----------|---|
| 700N4         |          | N-padlock device<br>yellow/red          | 700N1         |          | N-padlock device<br>black                 |
| 700M4         |          | M-padlock device<br>yellow/red          | 700M1         |          | M-padlock device<br>black                 |
| 700V4         |          | padlockable with V-handle<br>yellow/red | 700V1         |          | padlockable with V-handle<br>silver/black |

#### Dimensions in mm:

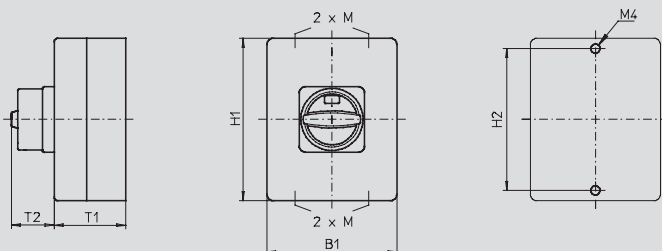

| Mounting form | H1  | B1  | T1 | T2 | 2×M   | H2  |
|---------------|-----|-----|----|----|-------|-----|
| 700N4 / 700N1 | 125 | 100 | 85 | 33 | 20/25 | 115 |
| 700M4 / 700M1 | 125 | 100 | 85 | 38 | 20/25 | 115 |
| 700V4 / 700V1 | 125 | 100 | 85 | 32 | 20/25 | 115 |