

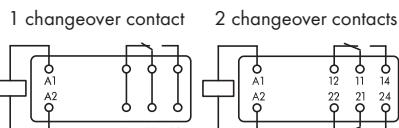
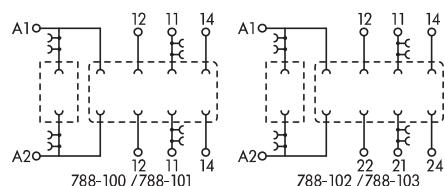


	<b>Sockets for miniature switching relay 1 changeover contact / 2 changeover contact</b>	
--	--	--

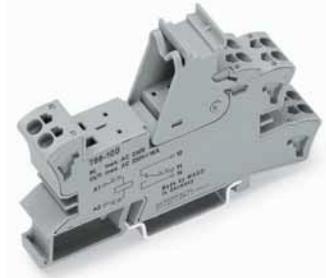

View on pins

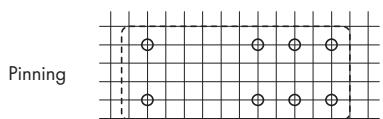

Description	Item No.	Pack. unit
Socket without relay, for DIN 35 rail		
Relay height 15 mm, 1 changeover contact	788-100	1
Relay height 15 mm, 2 changeover contacts	788-102	1
Relay height 25 mm, 1 changeover contact	788-101	1
Relay height 25 mm, 2 changeover contacts	788-103	1

## Technical Data

Max. continuous current	16 A / 2 x 8 A
Nominal input voltage ( $V_N$ )	depending on relay; max. 250 V AC
Dielectric strength	5 kV (depending on relay)
Max. switching voltage	250 V AC
Max. Switching power (resistive)	4000 VA AC
Nominal operating mode	continuous duty
Nominal voltage acc. to VDE 0110 Part 1/4.97, IEC 60664-1	250 V / 4 kV / 3
Degree of protection	IP20
Ambient operating temperature	-25 °C ... +70 °C (depending on relay)
Storage temperature	-40 °C ... +80 °C
Wire connection	CAGE CLAMP®S
Cross sections	0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup> / AWG 22 ... 12
Stripped lengths	9 ... 10 mm / 0.37 in
Approvals	DIN VDE 0140 part 1, DIN EN 61140; DIN VDE 0160, EN 50178; degree of protection II