



## Main

Size	52 mm
[Sn] nominal sensing distance	4 mm
Electrical connection	Cable
[Us] rated supply voltage	24...240 V AC/DC 50/60 Hz
Switching capacity in mA	5...200 mA AC/DC
IP degree of protection	IP68 double insulation conforming to IEC 60529





## Complementary

Front material	PPS
Status LED	Output state: 1 LED (yellow)
Supply voltage limits	20...264 V AC/DC
Maximum residual current	0.6 mA open state
Switching frequency	<= 25 Hz AC <= 3000 Hz DC
Maximum voltage drop	<5.5 V (closed)
Marking	CE
Threaded length	42 mm
Length	52 mm

## Environment

Product certifications	CSA Ecolab UL
Vibration resistance	25 gn amplitude = +/- 2 mm (f = 10...55 Hz) conforming to IEC 60068-2-6
Shock resistance	50 gn for 11 ms conforming to IEC 60068-2-27


## Offer Sustainability

Sustainable offer status	Green Premium product
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)  <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	 Yes
Environmental Disclosure	 <a href="#">Product Environmental Profile</a>
Circularity Profile	 <a href="#">End Of Life Information</a>

## Contractual warranty


Warranty	18 months
----------	-----------

## Dimensions

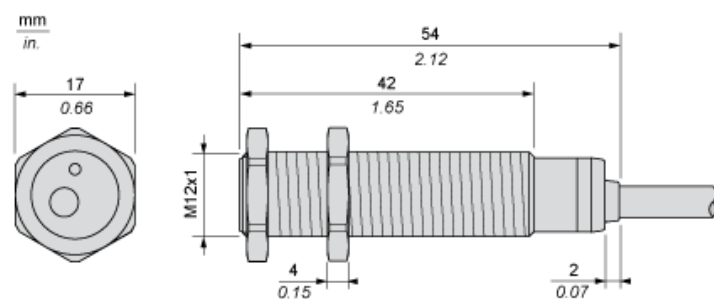

## Minimum Mounting Distances


Side by side



e (1) 16 mm/0.63 in.

≥


Face to face



e (2) 48 mm/1.89 in.

≥


Facing a metal object



e (3) 12 mm/0.47 in.

≥


Mounted in a metal support



d ≥ 36 mm/1.42 in.

h ≥ 8 mm/0.31 in.

## Mounting

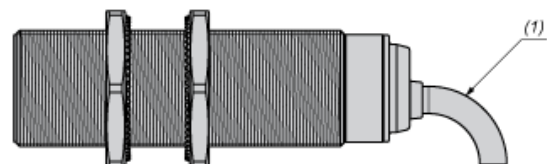


(1) Bending cable: 4 x external cable diameter

## Wiring Schemes

### 2-Wire AC or DC

NO output




BU : Blue  
BN : Brown

---

Performance Curves

---

Standard Steel Target : 12x12x1 mm

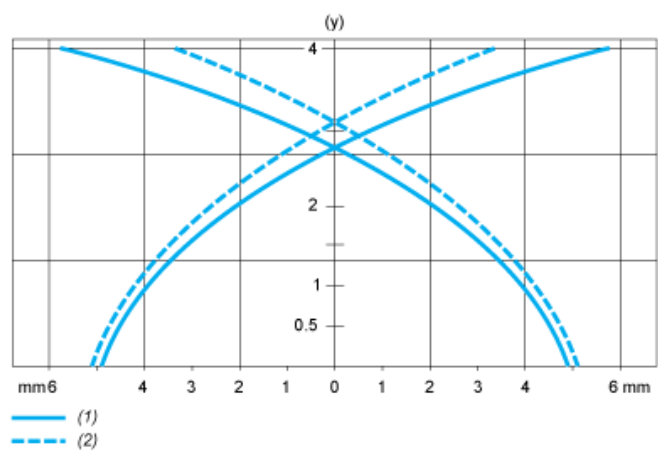

- (1) Pick-up points  
(2) Drop-out points (object approaching from the side)  
(y) Sensing distance in mm